


- Used with ILA Wi -Plus & ILA Wi -Enterprise Controller
- Monitors and Controls 1 Door
- Supports Wireless or RS485 Networks
- 10000 Users (Fingerprint) depending on controller
- Programmable sensor scan mode
- 128 User Groups, 128 Time Zones
- Challenge facility
- Local Proximity Reader (Clock & Data)
- Tamper protection
- Tamper Output extendable to Intruder Panel
- Easy Programming via ILA Software



- Standard, Toggle & Manager Users
- Intruder & Fire Alarm Interface, Interlock, Anti-Tailgate
- Keypad Backlit
- 1 x 5amp Relays 240vac
- 3 Inputs - 1 Programmable (7 Options)
- 2 Outputs - 1 Programmable
- Key Programmable Features:
 - Door Timers
 - Door Options
 - User Groups
 - Time Zones
 - Timed Actions
 - Alarm Options
 - Door Groups
- Robust Polycarbonate Housing
- Stainless Steel Keys
- Mounts onto standard Electrical Patress box and flush mounts onto a wall
- 2 Year Warranty.

Supply	12 DC only
Current consumption	100mA
Current consumption with load (max)	140mA
Relay Contact Rating	5 Amps /240V ac
Operating Temperature	0C to +60 C
Moisture Resistance	IP 65
Dimensions	W. 87mm D. 35mm H. 160mm

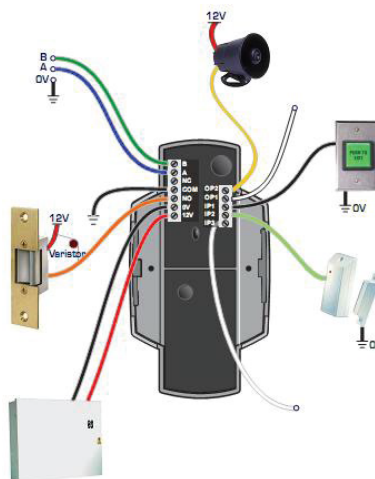

2480 South 3850 West, Suite B
Salt Lake City, UT 84120
(866) 975-0101 • (866) 975-0404 fax
www.transmittersolutions.com

To have your fax number removed from future specials, please call Removal Services - 800-915-2571 ext. 47540 or fax to 866-975-0404.