

Add Mobile Credentials to ANY Wiegand or Stand Alone system



Retrofit or New Installs: Make any system bluetooth Make ANY wiegand device mobile credential friendly



SPECIFICATIONS

- AES128
- Mobile Application
- Works with any wiegand bit format
- Working Environment: -40 C to +85 C
- Allows for dual authentication security with card + pin mode

WIRING

RED = 8-24 VDC

BLACK = GND

GREEN = Wiegand D0 / Relay 1


 $\label{eq:YELLOW} \textbf{YELLOW} = \textbf{Wiegand D0 Pullup (Optional if not provided by reader or panel)}$

WHITE = Wiegand D1/ Relay 2

VIOLET = Wiegand D1 Pullup (Optional if not provided by reader or panel)

BROWN = RS-485 A ORANGE = RS-485 B

 $\label{eq:blue} \mbox{BLUE} = \mbox{RS-485\,TERMINATION} \mbox{ (Optional with SynQ if not provided by reader)}$

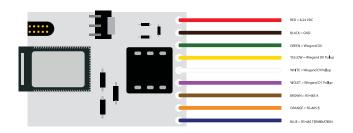

DIMENSIONS

