TOUCHLESS SENSOR EXIT BUTTON

FEATURES


INSTALLATION

- No touch / Touch free Exit Sensor (Diffused Detection)
- Optical / Infrared Technology
 IP-55 Ingress Protection / SUS 304 Stainless steel Plate
- User friendly (Healthy protection):
 Free from contagious diseases spread
- Detection range: 0.1 ~ 10 cm
- Application: Gate/Door/Exit/Automation control




WALL 0 (h


SENSING RANGE



LED Indicator

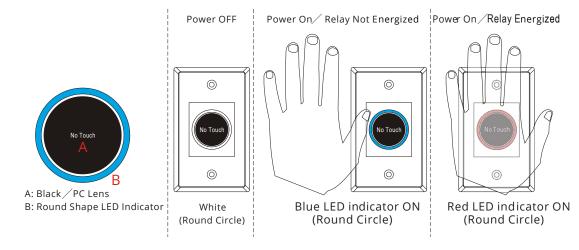



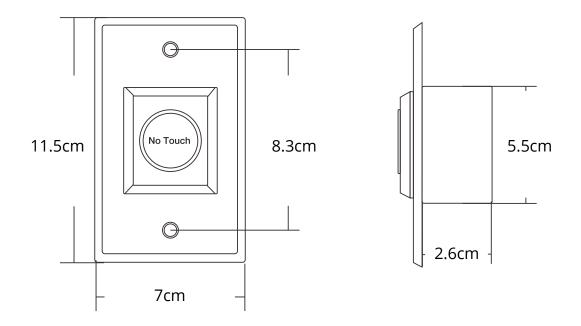

Specification

- Dimensions: 11.5L * 7W * 3H (cm)
- Contact Rating: 12-24V,3A
- Output: NO/NC/COM
- **Power**: 12VDC & 24VDC
- Panel: .07 cm Thick 304 Stainless Steel
 Weight: 110 grams
- **Operating temp**: -20°C~+55°C(14-131F)

Wiring

- Suitable Humidity: 0-95% (relative humidity)
- LED Indicator: Blue LED indicator (Standby) Green LED indicator (Sensation)

CONTACT YOUR SALES REP FOR MORE INFORMATION



Rea	:	+12~24V DC
Black	:	GND
Yellow	:	NO
White	:	COM
Green	:	NC