




NO TOUCH ADA ACCESS RETROFIT MODULE


ELIMINATE THE NEED TO TOUCH THE ADA BUTTON WITH THE CONTACTLESS MODULE

Product Highlights:


- Maintain the existing function of installed ADA Button
- Maintain mechanical function in the event of a power outage
- Use the two wired module to eliminate the need to run additional wiring
- Easy to install

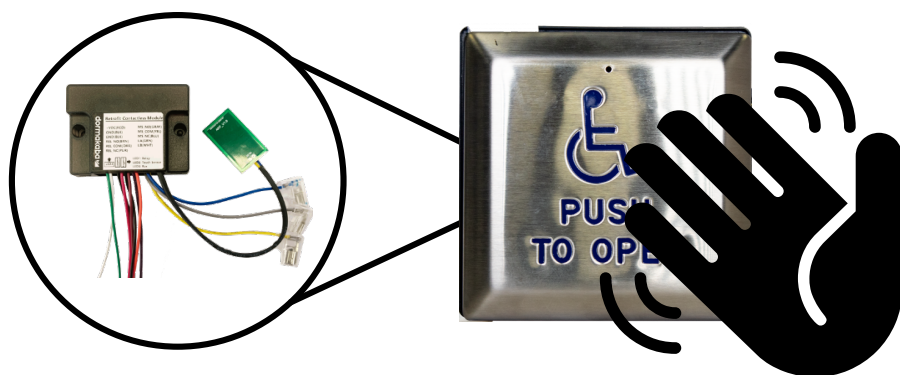

WAVE TO OPEN



Retrofit Contactless Module (RCM)

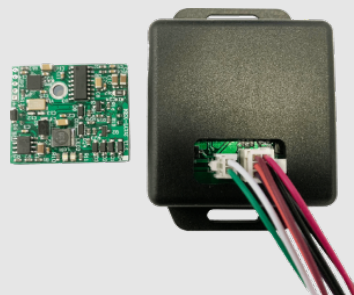

Two Wire Module (TWM)

OPERATING SPECIFICATIONS

	Contactless Exit Button Module	Two Bus Module (Slave)	Two Bus Module (Master)
Operating Voltage	10-24VDC	12-24VDC	12-24VDC
Operating Current	50mA (max at 12Vdc)	200mA (max at 12Vdc)	200mA (max at 12Vdc)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)		
Casing Material	PC+ABS	N/A	PC+ABS
Operating Humidity	10% - 90%		

1 (866) 975-0101

2480 SOUTH 3850 WEST, SUITE B
SALT LAKE CITY, UT 84120

WWW.TRANSMITTERSOLUTIONS.COM

Transmitter 
SOLUTIONS®