


PKSP-H

Wiegand/ RS485 Single Gang Keypad with Card Reader




FEATURES

- Non-Scratch Surface
- Desfire, HID & EM
- Touch Sensor Keypad
- Metal Back Plate
- Non-Drop Bottom Screw
- Indoor & Outdoor use
- Tamper Protection
- Single Gang Reader/ Keypad

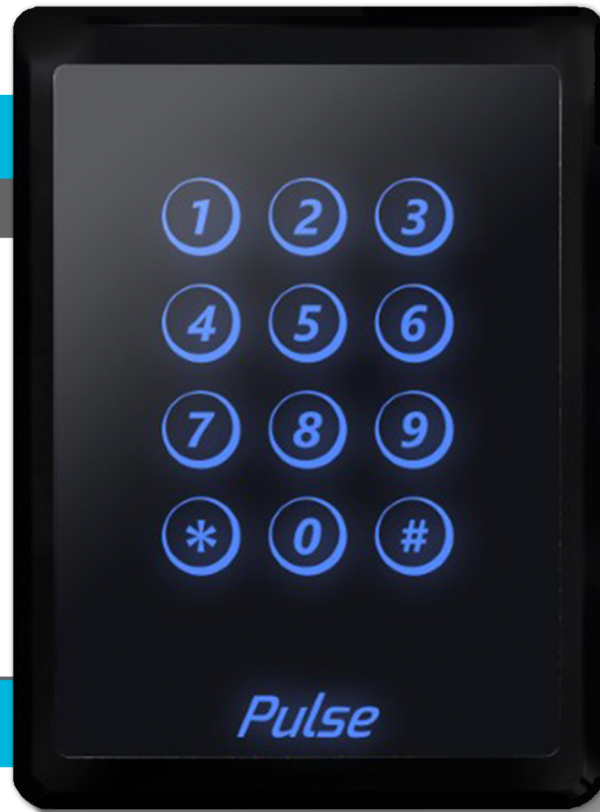

SPECIFICATIONS

User Capacity	26-Bit Wiegand/ RS485, (4 or 8 or 10) bit burst
IP Rating	IP65 Certified
Wiring Distance	492FT (22 AWG with shielded cable)
Temperature Rating	-22°F to 158°F
Proximity Card Reader	ISO14443A-Desfire, HID & EM
Read Range	2-5 cm
Operating Voltage	10V-15VDC
Dimensions	4-1/2 (L) x 3-1/4" (W) x 3/4"(D) inches
Weight	5-3/4 oz
Operating Current	160mA(max)



MOBILE CREDENTIALS AVAILABLE USING SYNQ

Ask your sales rep about SynQ today!



2480 South 3850 West, Suite B
Salt Lake City, UT 84120
(866) 975-0101 • (866) 975-0404 fax
www.transmittersolutions.com

All items are trademarks of their respective holders.

To have your fax number removed from future specials, please call Removal Services - 800-915-2571 ext. 47540 or fax to 866-975-0404.