


EIS-Controller

Caller ID and Wiegand access control device



FEATURES

- Integrated 4G – LTE module for USA network compatibility
- Access control with support for up to 1,000 PIN codes
- Caller ID access control for up to 1000 authorized phone numbers
- 2 Wiegand input interfaces + 16 additional Wiegand inputs via EXIO extension modules
- (2 + 16) Programmable relay outputs for access control and automation

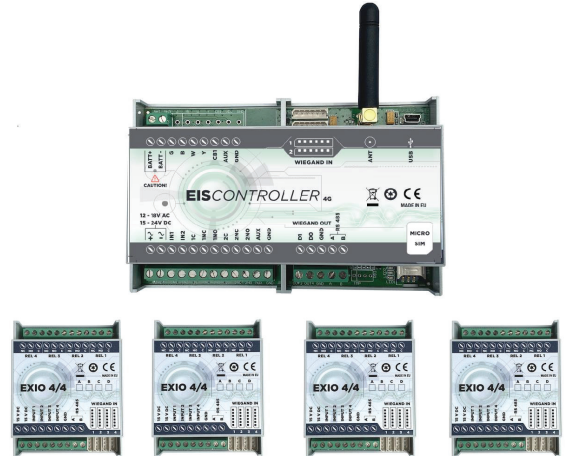

SPECIFICATIONS

Power supply	14.4/24 VDC 12-16 VAC
Current Consumption	
Transmitting Mode	130mA
Idle Mode	75mA
Unit Dimensions	6-1/8 x 4-1/2 x 2-3/8 “
External Patch Antenna SMA	1
Front Plate	Grade 304 Stainless Steel

ACCESSORIES

EISWARE™

Programming Software

Available on IOS or Android App and online at www.eisware.com.

Search:
EISWARE WEB



Optional receiver and transmitter module for wireless application



2480 South 3850 West, Suite B
Salt Lake City, UT 84120
(866) 975-0101 • (866) 975-0404 fax
www.transmittersolutions.com