


Eis ENTRY-1

4G Telephone Entry & Access System



FEATURES

- Integrated 4G module for global network compatibility.
- Supports 1 intercom call button, with 5 programmable phone numbers
- Supports 4G GSM Wireless via the SIM provided with the Unit.
- Caller ID access control for up to 1,000 authorized phone numbers.
- Wiegand Input - 2 Wiegand inputs.
- Two programmable relay outputs for access control and automation.
- Real-Time Event Log for 20,000 Events
- Keypad access control supporting up to 1,000 PIN codes at no extra cost
- External Patch Antenna with SMA Connector

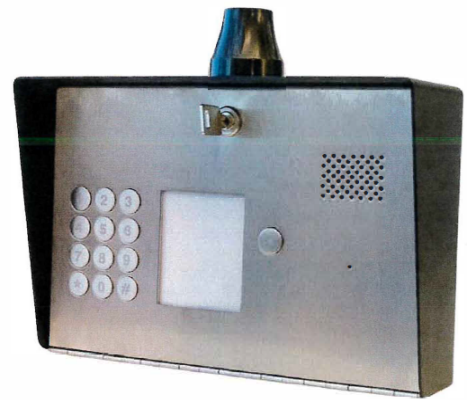

SPECIFICATIONS

Mounting	Post or Surface
Format	Wiegand 26-bit input / output
Power supply:	• 14.4/24 VDC • 12-16 VAC
Current Consumption:	
Transmitting Mode	310mA / 14 VDC
Idle Mode	240mA / 14VDC
Unit Dimensions	11 x 7-1/2 x 2-3/8"
External Patch Antenna SMA	1
Front Plate	Grade 304 Stainless Steel
Lockable Housing	Powder coated


ACCESSORIES

EISWARE®

Programming Software & Apps

Available on iOS or Android App and online at www.eisware.com.

Search:
EISWARE WEB



Optional receiver and transmitter module for wireless application



2480 South 3850 West, Suite B
Salt Lake City, UT 84120
(866) 975-0101 • (866) 975-0404 fax
www.transmittersolutions.com